




CCFO



Certificado por:

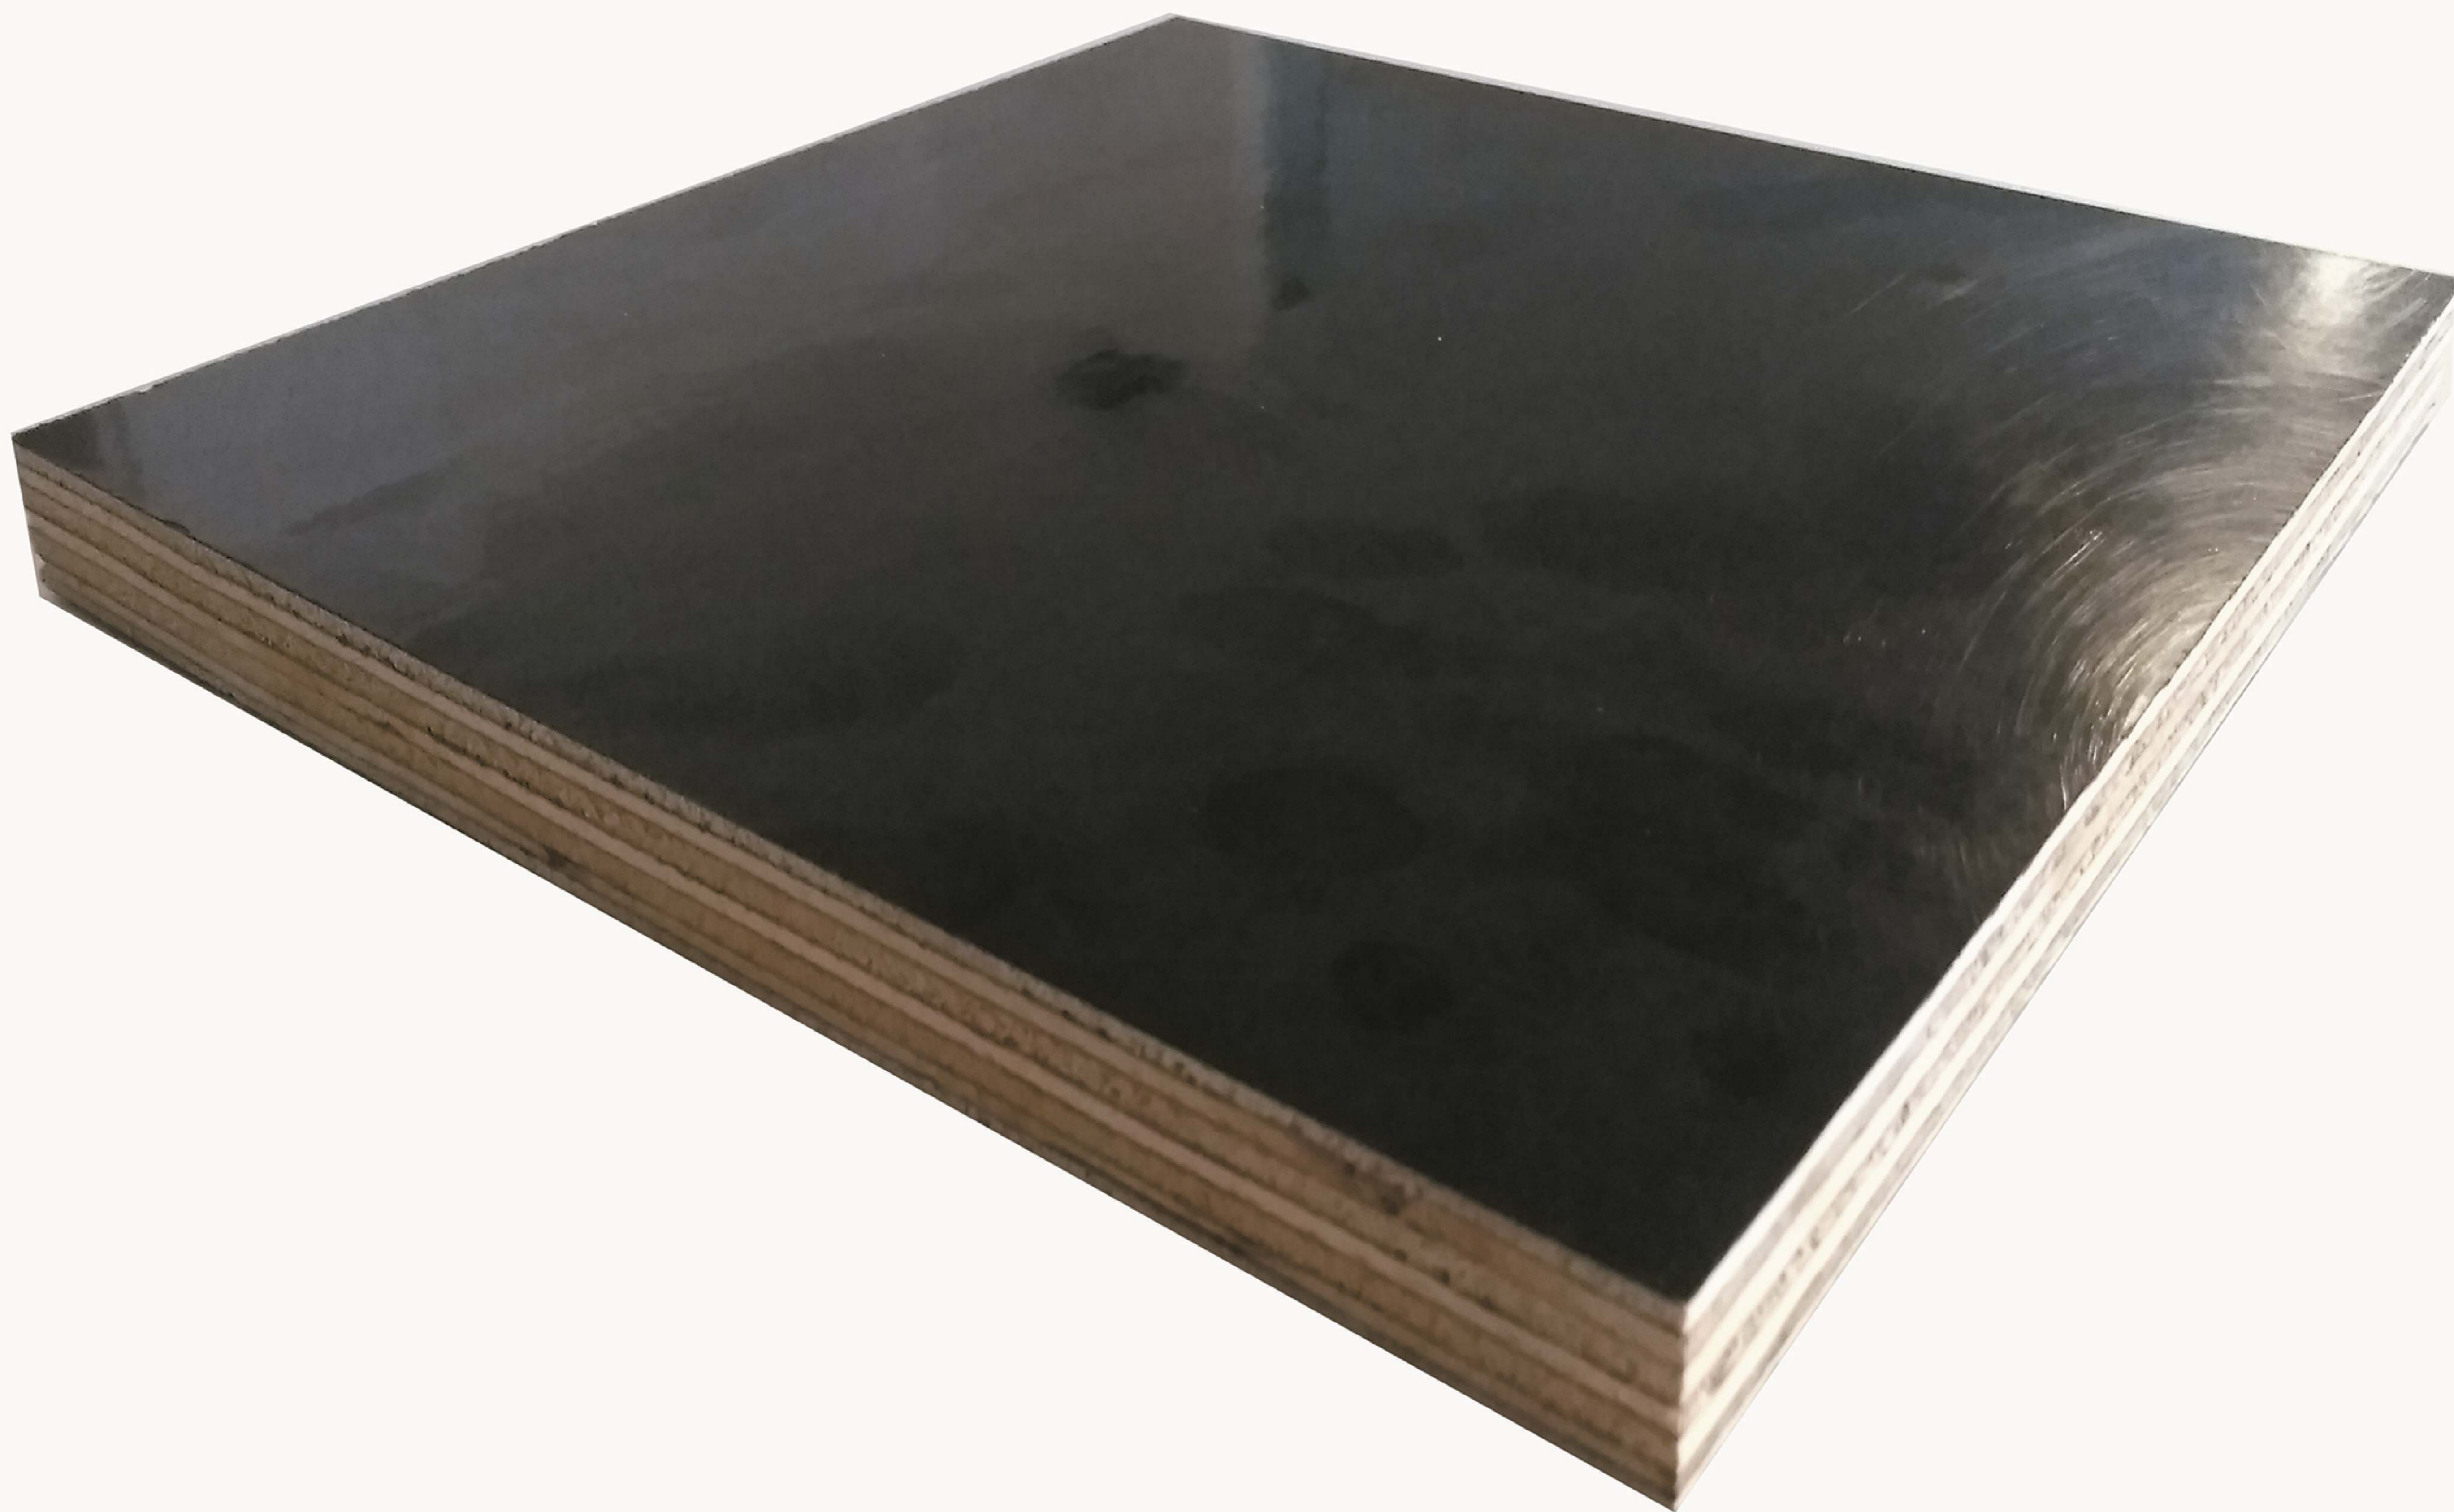

Datasheet
TACHA-FORM CCFO Board
Specifications

CCFO

Multilayer wood plywood glued with BWP phenolic resin, mounted alternately in the direction of the grain. Manufactured and calibrated in two steps of CCFO coated in the front view and natural in the back view.

DIMENSIONS

4ft x 8ft (122cm x 244cm)

THICKNESS

12.7mm, 15mm y 19mm.

Resistance to humidity and the weather; marine type 3 plywood board. Dimensional stability and uniformity of mechanical resistance.

It guarantees an architectural finish of the highest quality and maximum thickness.

Higher cost-benefit for its greater number of re-uses* thanks to its High Density Resin.

APPLICATIONS	HORIZONTAL	VERTICAL SITE	VERTICAL FORMWORK SISTEM
1-Step 70/0 CCFO	5 - 8	8 - 14	70 - 80
2-Step 70/0 CCFO	12 - 18	12 - 20	

Has a protective film with a content of 35 % phenolic resin of 0.020" thick almond color. Can be 100/30 grams of resin per square meter, it give a good resistance to abrasion, moisture absorption and alkaline solutions.

Separation of support	Board Thickness			Loading Table
	12.7 mm	15 mm	19 mm	
200 mm	6260	7980	8230	Permissible pressure in k/m ² with 1 1/2" wide (38mm) frame supports and placed perpendicularly in the grain direction.
300 mm	2275	3680	5000	
400 mm	1050	1750	2740	
500 mm	550	945	1560	
600 mm	350	565	930	

BOARD TACHA-FORM CCFO APPLICATIONS

it is a plywood specially designed for construction because it provides a dimensional rigidity, giving fine finishes of the highest quality and a greater number of uses, thanks to its coating - mirror finish this give use a higher cost benefit than any other type of technician plywood.

When making cuts in the board is necessary to seal the edges of the board (paint or sealer) to prevent the absorption of moisture.

Using screws to attach to the frames, this prolongs the life of the board.

Do not use nails

If you use vibrator when casting concrete, use a rubber tip to avoid damaging the board.

Clean the board with a brush or plastic spatulas after each use.

The boards TACHA-FORMCCFO contain agents that favor their demolding. It is not advisable to use diesel or motor oil as they degrade the quality of the coating, can be lightly coated with liquid waxes or other good quality

*With excellent handling, operation and maintenance.

Carr. Los Reyes - Lechería km. 23 Col. El Xolache | Texcoco de Mora
Estado de México | C. P. 56170 | ventas2@infores.com.mx | 5557590045